

POWERLIGHT®

24 Vdc IGNITER

5272005U -
Igniter Only

PRODUCT SHEET

Features & Benefits

- **External heat sink eliminated for improved performance and reduced frequency of replacement due to overheating and arcing.**
- **Lightweight, single piece design is compatible with Beckett and other burners to reduce required inventory.**
- **Fully potted with improved epoxy to withstand thermal shock and protect electronic components; waterproof.**
- **Simplified wiring requirements and fewer wires for ease of installation.**

Product Description

Beckett's new PowerLight igniters offer improved performance and longer life. This igniter is easy to install and is designed as a universal replacement in Beckett and other manufacturer's burners.



Functionality

- 20kV peak rating guarantees quick and efficient ignition
- Weighs less than 1 lb. versus an 8 lb. iron core transformer, making shipping and installation easier
- A vacuum encapsulation process, using epoxy, provides resistance to moisture, excellent heat dissipation and electrical insulation
- Case material is high-temperature thermoplastic that provides high impact strength, scratch resistance, impenetrable to oil and most chemicals
- Adapts to multiple baseplates - making it the most versatile unit on the market.
- Epoxy potting will not shrink or crack like tar-filled transformers

Available Igniters



5272001U -
Beckett ADC




5272002U -
Beckett SDC

Beckett®

POWERLIGHT® 24Vdc IGNITER

Product Dimensions

Weight:
Less than 1 lb.

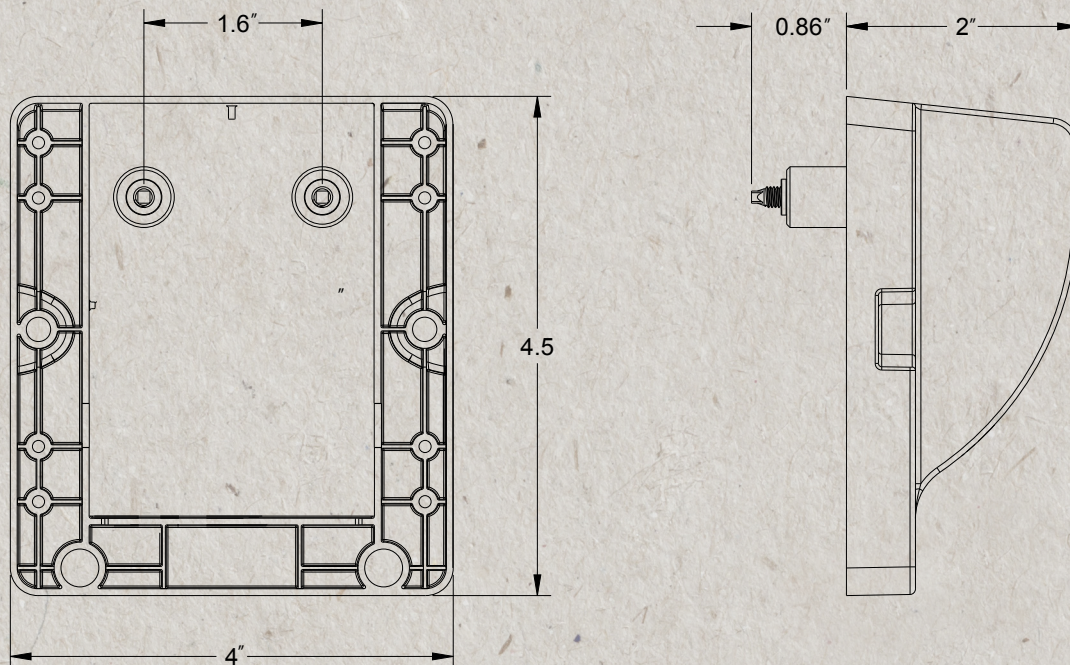

Ordering Information

Igniter	Description	Replaces
5272001U	Beckett ADC 24 Vdc	5218501U
5272002U	Beckett SDC 24 Vdc	5218502U
5272005U	Igniter only	5218503U

Igniter Baseplate Kits

(includes 1 baseplate, hardware and instructions)

Part Number	Description
51830U	Beckett A Housing
51831U	Beckett S Housing

Product Specifications

Input Voltage: 21.6 - 32 Vdc

Output Voltage: 20 kV peak

Output Current: 35 mA RMS

Input Current: 2.0 A Maximum

Ambient Operating Temperature:
-40°F (-40°C) to 150°F (66°C)

Storage Temperature:
-40°F (-40°C) to 150°F (66°C)

Moisture: 5 to 95% Relative Humidity

USA: **R.W. Beckett Corporation**, 1-800-645-2876
Canada: **R.W. Beckett Canada Ltd**, 1-800-665-6972

www.beckettcorp.com

Form No. 62245-005, R1

This document and all information contained herein are the sole property of the R.W. Beckett Corporation and cannot be reproduced or transmitted in whole or part without express written permission of the R.W. Beckett Corporation.

Beckett®